



## Long Road Racing

2668 Peachtree Road, Statesville, NC 28625  
(980) 223-8547 LongRoadRacing.com

### Global MX-5 Cup Car Technical Service Bulletin #05-23-2019

#### Optional: Global MX-5 Cup Cooling management tools

**This TSB describes:** The purpose of this TSB is to provide ND2 drivers and teams with additional cooling information that may be employed during very tight drafting conditions. A few drivers have experienced higher than normal coolant temperatures when involved with extremely close drafting. Extensive testing has confirmed that this is due to reduced air flow to the nose of the car combined with the higher heat generated by the more powerful ND2 engine. Please reference the engineering test report on the LRR website for additional information.

#### Practical data and temperature management:

- During tight drafting with the increased RPM and HP additional heat is being generated by the ND2 engine, some cooling air must be provided to the nose of the car. Extensive testing has confirmed that when the trailing car runs greater than approximately 3 – 4' from the car in front, that there is then the minimal amount of air required to maintain a safe water temperature. Once the car-to-car distance is less than 3 or 4', there is then not enough air getting to the nose of the car to dissipate the additional heat generated at high RPM's and excessive water temperatures may occur.
- It is imperative that you monitor your coolant temperature and then manage the draft while at the same time providing cooling air to the car.

#### Some mechanical items to provide additional cooling capabilities:

- An optional higher-pressure radiator cap. This is to assist with water retention if coolant temperatures rise above the 215F mark.
- Optional oil coolant line bypass. This option will keep the water pump housing cooler thus improving possible cavitation issues if a driver experiences excessive water temperature
- **NOTE: If you decide to install the optional pressure cap or coolant line bypass, Long Road Racing will provide you these items for no charge. Please send a note to [Info@LongRoadRacing.com](mailto:Info@LongRoadRacing.com) with your chassis number and ship to information.**
- Optional foam / tape up of the radiator ducting. This is to assist air flow through the radiator only. It will be up to the individual teams as to how much and exact placement of tape or foam, from between the grill and the face of the radiator surface. **No** additional tape or foam may be used for enhanced engine inlet air flow or any aerodynamic advantage. It is strictly to allow for enhanced airflow to the radiator ONLY.
- Optional oil temp sensor – while this is always been an option for the ND1 and ND2 cars, it is suggested that the driver and team have access to the engine oil temperature data.

#### Between session maintenance:

- It is imperative that the engine water level be checked after each session.
  - While this is more of a 'best practices' item, water that leaves the sealed system may not be fully reabsorbed back into the engine, therefore checking the coolant level must be checked after every session.
  - If the car loses even a small amount of coolant over several sessions, and is not refilled, the car will then be low on coolant (below the radiator cap) and contributing to further cooling issues.



## Long Road Racing

2668 Peachtree Road, Statesville, NC 28625  
(980) 223-8547 LongRoadRacing.com

### Optional ND2 Oil Cooler Bypass Hose Delete

#### Tools and Mazda parts needed

- Tools for Removing Hose Clamps
- Panel Retainer Clip Removal Tool
- 3/8 Drive Ratchet and 3/8 Drive 10MM Socket
- Phillips Head Screwdriver
- Coolant to Top Off System
- Drain Pan for Coolant
- Cap = Mazda Part 0000-08-D237
- High-Pressure Cooling System Cap = Mazda Part 0000-08-D236

#### Getting Started

- Follow all safety precautions. Never open a hot cooling system. Use safety glasses.
- Remove Floor Panel from Beneath Radiator to Allow for Draining of Coolant from System.
- Remove Cooling System Cap.
- Open Drain Petcock on Radiator.
- Drain Coolant Until Level is Below Upper Radiator Hose.

#### Oil Cooler Bypass Hose Delete

The oil cooler bypass hose is located on the Thermostat/Water Pump Housing and is connected to the plastic cooling system cap housing located on the front of the engine. Removal of the hose will require installing caps (Mazda Part - 0000-08-D237) on the housings. It is important to service these caps in the same manner that any other hose in the cooling system would be serviced. Inspect caps between every on-track session and replace as needed.






## Long Road Racing

2668 Peachtree Road, Statesville, NC 28625

(980) 223-8547 LongRoadRacing.com

### Step 1 – Access to Oil Cooler By-pass Hose

- Remove Cooling System Catch Tank.
- Un-clip MAF Sensor Connector.
- Remove air intake hose.
- Use 10mm Socket to Remove Air Filter Housing Retaining Bolt.
- Un-clip top of Air Filter Housing and Remove.
- Remove lower section of air filter housing.

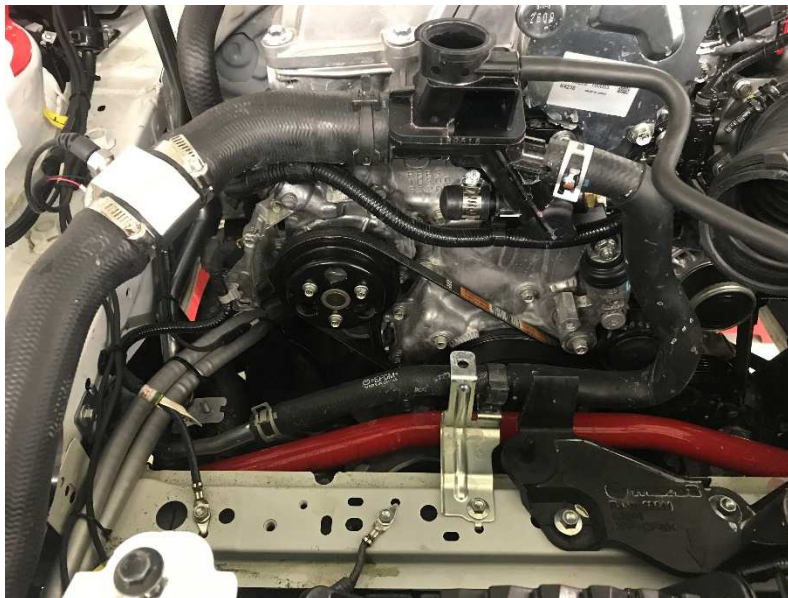

*Winning with Personal Service since 2001*






## Long Road Racing

2668 Peachtree Road, Statesville, NC 28625

(980) 223-8547 LongRoadRacing.com

### Step 2 – Remove Oil Cooler Bypass Hose

- Remove pinch clamps from bypass hose at each end.
- Remove bypass hose. Some coolant may be present.

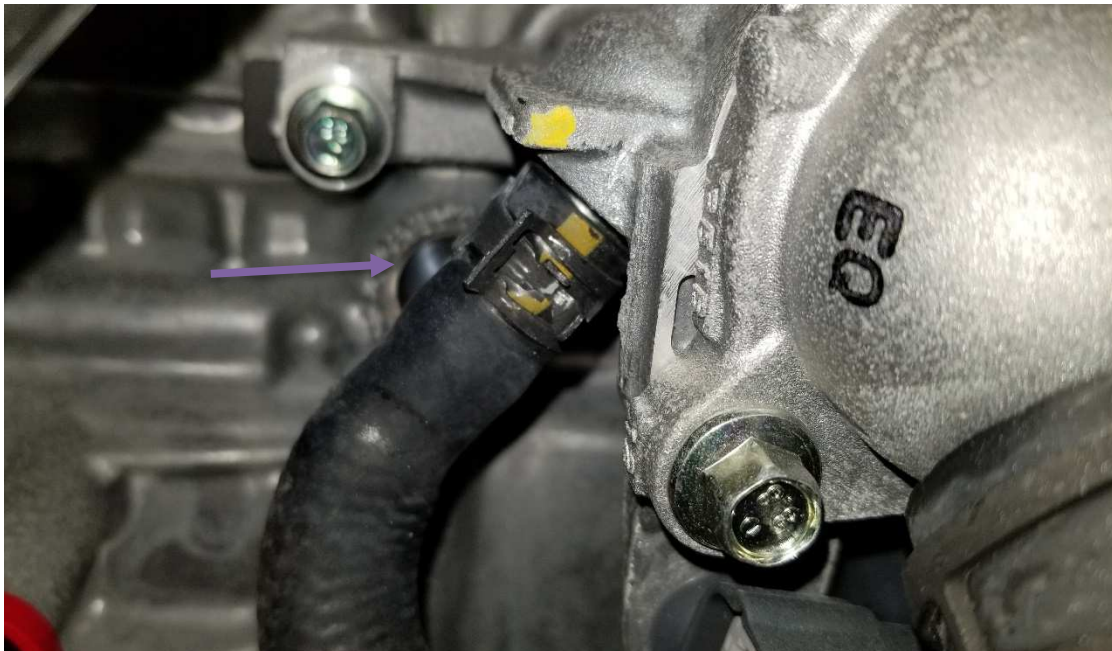




## Long Road Racing

2668 Peachtree Road, Statesville, NC 28625

(980) 223-8547 LongRoadRacing.com

### Step 3 – Cap Bypass Hose Connections

- Place ½ inch cooling system bypass cap (Mazda Part - 0000-08-D237) onto cap housing nipple. Secure with Hose Clamp.

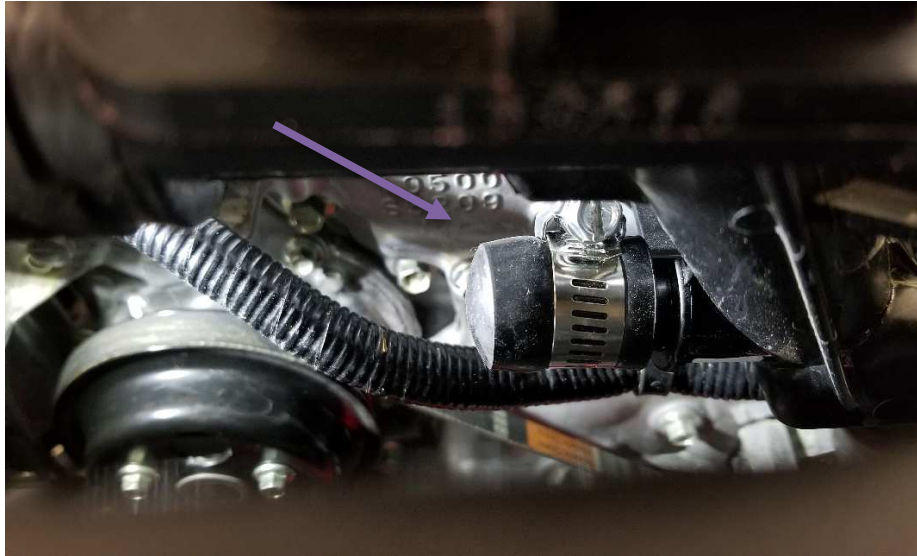

- Place 3/8 cap (Mazda Part - 0000-08-D237) on Thermostat/Water Pump Housing Nipple. Secure with Hose Clamp.





## Long Road Racing

2668 Peachtree Road, Statesville, NC 28625

(980) 223-8547 LongRoadRacing.com

### Step 4 – Re-install Components

- After Capping the Bypass Hose Connections, Re-install the Air Cleaner Box and Catch Tank.



### Step 5 – Refill Cooling System

- Ensure that the Radiator Drain Petcock is tight.
- Refill Cooling System with Proper Mix of Cool-Aid and Distilled Water.
- Ensure that there are no Air Pockets in the System. Run Engine Until Thermostat Opens (186 - 189 Degrees) and Check Coolant Level.
- Once System is Properly Filled, Install Updated High-Pressure Cooling System Cap (Mazda Part 0000-08-D236).



*Winning with Personal Service since 2001*





## Long Road Racing

2668 Peachtree Road, Statesville, NC 28625

(980) 223-8547 LongRoadRacing.com

### Optional Radiator Ducting Tape and Foam Installation Instructions

#### Tools Needed

- Tools to Measure and Cut Foam
- Hot Glue or Adhesive to Secure Foam to Floor Panel
- White Gaffer Tape
- Tools to Remove Front Bumper. Panel Clip Remover, 8mm Socket, Phillips Head Screwdriver

#### Getting Started

- Follow all safety precautions. Use safety glasses.
- Remove Front Bumper for Access to Radiator Ducting.
- Remove Floor Panel from Beneath Radiator if Not Already Removed.





## Long Road Racing

2668 Peachtree Road, Statesville, NC 28625  
(980) 223-8547 LongRoadRacing.com

### Step 1 – Radiator Foam

- Type of Foam Used Is Open. Two Pieces Required.
- Type of Adhesive Used Is Open.
- Cut Foam to Fit Gaps Between Floor and Bottom of Radiator.
- Foam Used as Example Pictured Below.







## Long Road Racing

2668 Peachtree Road, Statesville, NC 28625

(980) 223-8547 LongRoadRacing.com

### Step 2 – Foam Fitment and Installation

- Check Fit of Foam Before Gluing to Floor Panel



O

*Winning with Personal Service since 2001*



## Long Road Racing

2668 Peachtree Road, Statesville, NC 28625

(980) 223-8547 LongRoadRacing.com

### Step 3 – Glue Foam

- Using Adhesive, Glue Foam to Floor Panel in the Same Manner as the Factory Foam Piece.



- Once Foam Is secured, Re-install Floor Panel Beneath Radiator.

### Step 4 – Optional Radiator Ducting Tape and Re-assembly

- Use of White Gaffer Tape Required.
- Taping of Duct Work is open.
- Tape Up Gaps and Seams in Radiator Ducting.
- Pictures Below for Reference
- Re-Install Front Bumper

**NOTE:** This is to assist air flow through the radiator only. It will be up to the individual teams as to how much and exact placement of tape or foam, from between the grill and the face of the radiator surface. No additional tape or foam may be used for enhanced engine inlet air flow or any aerodynamic advantage. It is strictly to allow for enhanced airflow to the radiator **ONLY**.





## Long Road Racing

2668 Peachtree Road, Statesville, NC 28625

(980) 223-8547 LongRoadRacing.com



*Winning with Personal Service since 2001*





## Long Road Racing

2668 Peachtree Road, Statesville, NC 28625

(980) 223-8547 LongRoadRacing.com



If you have any questions about this Technical Bulletin, please contact Long Road Racing at:  
[Info@LongRoadRacing.com](mailto:Info@LongRoadRacing.com) or 980-223-8547

*Winning with Personal Service since 2001*